




Analog Convection Gauge; 1 x 10⁻³ Torr to Atmosphere

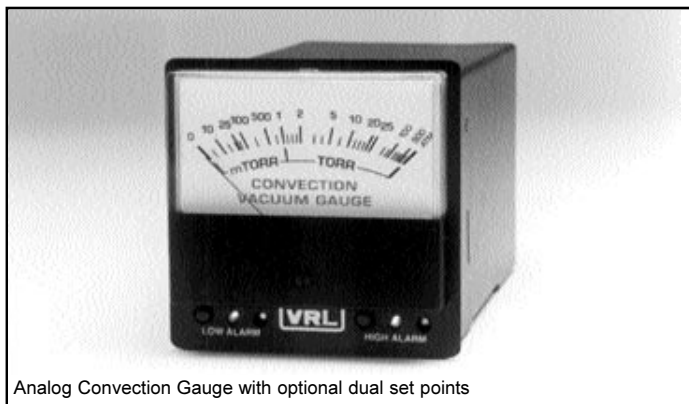

Analog Convection Gauge with optional dual set points

- Wide Range; 1 mTorr to Atmosphere
- 5 VDC Analog Output for Computer Interface
- 1/4 DIN Bench or Panel Mount Enclosure
- Two Set Points with 3 Amp Relays Optional
- Single Sensor Covers Entire Range
- Under 1 Second Response to Rising Pressure
- All Cables and Mounting Hardware Included
- Extension Cables Available up to 500 Feet

Wide Range and Low Cost

The convection gauge is the lowest cost instrument that can provide a continuous monitoring and control of your vacuum system from atmosphere all the way down to 1 mTorr. The gauge tube is all stainless steel and is very rugged and reliable. The standard gauge tube has both 1/8 inch NPT and 1/2 inch O.D. smooth tubulation for sealing in compression ports. Optional flanges include NW and Conflat® and are described in the ordering information section below.

Temperature Compensated

An internal temperature compensator virtually eliminates the errors due to ambient temperature changes that are so troublesome with other convection gauges.

Specifications, Analog Convection Gauges

- Range of Measurement:** 1 milli Torr to Atmosphere.
- Sensor Type:** Thermal convection.
- Resolution:** ± 2 milli Torr from 1 to 25 milli Torr; or 2% of meter full scale.
- Response Time:** Less than 1 second for 90% of an increase in pressure, less than 4 secs. for a decrease in pressure from atmosphere to 1 mTorr.
- Hysteresis:** Minimum hysteresis is less than 2 mTorr from 1 to 25 mTorr and less than 2% of full scale to atmosphere. To prevent relay chatter hysteresis is adjustable to as high as 5% of full scale.
- Maximum Pressure without Calibration Change:** 2300 Torr (30 PSIG)
- Maximum Gauge Tube Temperature:** 100 °C (212 °F) maximum bake out of gauge tubes in air or vacuum. Automatic compensation 0 to 35°C.
- Display:** Precision analog meter.
- Analog Output:** 0 to 5 VDC, non linear.
- Gauge Tube Orientation:** Axis of tube must be horizontal.
- Line Power:** 95 to 125 VAC, 50/60 Hz; 220 VAC optional, no extra cost.
- Wattage:** 5 watts with both relays energized.
- Line Cord:** 3 wire 1.7 meter (65 inch) attached.
- Gauge Tube Cable:** Standard length is 3 m (10 ft.) attached to cabinet. Use up to 150 m (500 ft.) without affecting calibration.
- Mounting:** 1/4 DIN enclosure suitable for panel or bench mounting. Panel mounting jack screws included. Carry handles also available.
- Weight with Gauge Tube:** Net: 4 lb. (1.8 kg); Ship: 4.8 lbs. (2.2 kg.)
- Optional Set Points and Relays:** 2 independent set points with front panel LED indicators and 2 SPDT relays 3 amp @ 115 VAC, non-inductive. Adjustable from front panel over 100% of range.

Safe With Mercury and Fluorine

Mercury and Fluorine vapors are no problem for the Vacuum Research convection gauge. Our filament is a platinum alloy which operates below 100 °C and all other gauge tube components exposed to vacuum are 300 series stainless steel. For outdoor applications, or for corrosive environments, gauge tubes are also available with stainless steel connector pins.

Nitrogen, Argon and Other Gases

The convection gauge can be provided to read directly for argon or other gases. But, if your system uses a variety of gases, or if accuracy between 2 Torr and 800 Torr is critical in your process, then the Vacuum Research Wide Range Diaphragm Manometer instruments may be a better selection.

Ordering Information; Analog Convection Gauges

Analog Convection Gauge Controller

Two adjustable set points and a non-linear 0 to 5 VDC analog output. Large analog meter calibrated from 1 milli Torr to atmosphere, 760 Torr. 1/4 DIN enclosure with jack screws for panel mounting. Standard power is 95 to 125 VAC 50/60 Hz, 220 VAC optional at no extra cost. Add "220" suffix to P/N. Built to CSA standards. All cables included but gauge tube is not. (Use angle or inline style.) P/N: 902215\$519.

Analog Convection Gauge Indicator

Large analog meter calibrated from 1 milli Torr to atmosphere, 760 Torr. 1/4 DIN enclosure with jack screws for panel mounting. Standard power is 95 to 125 VAC 50/60 Hz, 220 VAC optional at no extra cost. Add "220" suffix to P/N. Built to CSA standards. All cables included but gauge tube is not. (Use angle or inline style.) P/N: 902214\$323.

Inline Style Convection Gauge Tube (Interchangeable with Angle)

Gauge Tube body and all wetted parts are 304 SS. Connector pins are nickel plated Kovar®.

- With 1/8 in. NPT and 1/2 inch OD Tube,** P/N: 912232\$92.
- With NW-16 Flange,** P/N: 912233 • **NW-25 Flange,** P/N: 912234 \$131.
- With 15 mm OD Tube,** P/N: 912235\$131.
- With 1.33 in. OD Conflat® (non-rotatable),** P/N: 912236\$131.
- With 2.75 in. OD Conflat® (non-rotatable),** P/N: 912237\$131.
- With VCR-8 Female,** P/N: 912238\$154.
- With VCR-4 Female,** P/N: 912239\$154.
- With 1/4 in. NPT (VEECO Special),** P/N: 912105\$119.

All Stainless Steel Gauge Tubes for outdoor applications. All wetted parts as well as all external parts and connector pins are 304 SS. Add SS suffix to tube P/N and to tube price:add \$42.

- 3 Position Gauge Tube Selector,** P/N: 902027\$350.
- Calibrator for Analog Convection Gauge,** P/N: 912183\$231.